

DISTRICT

diesse
tile specialists



DISTRICT



T 125x125 Mm / 5”x5”



DST 01



DST 02



DST 03



DST 04



DST 05



DST 06



DST 07



DST 08

TWIST 125x125 mm / 5”x5”




DST 09



DST 10



DST 11



DST 12



DST 13



DST 14



DST 15

ER 125x125 Mm / 5"x5"



DST 16



DST 17



DST 18



DST 19



DST 20



DST 21



DST 22

T DST 01 ►
Twist DST 10 & DST 11
Er DST 10 & DST 11









T DST 01 & DST 05
Twist DST 12
Er DST 19
















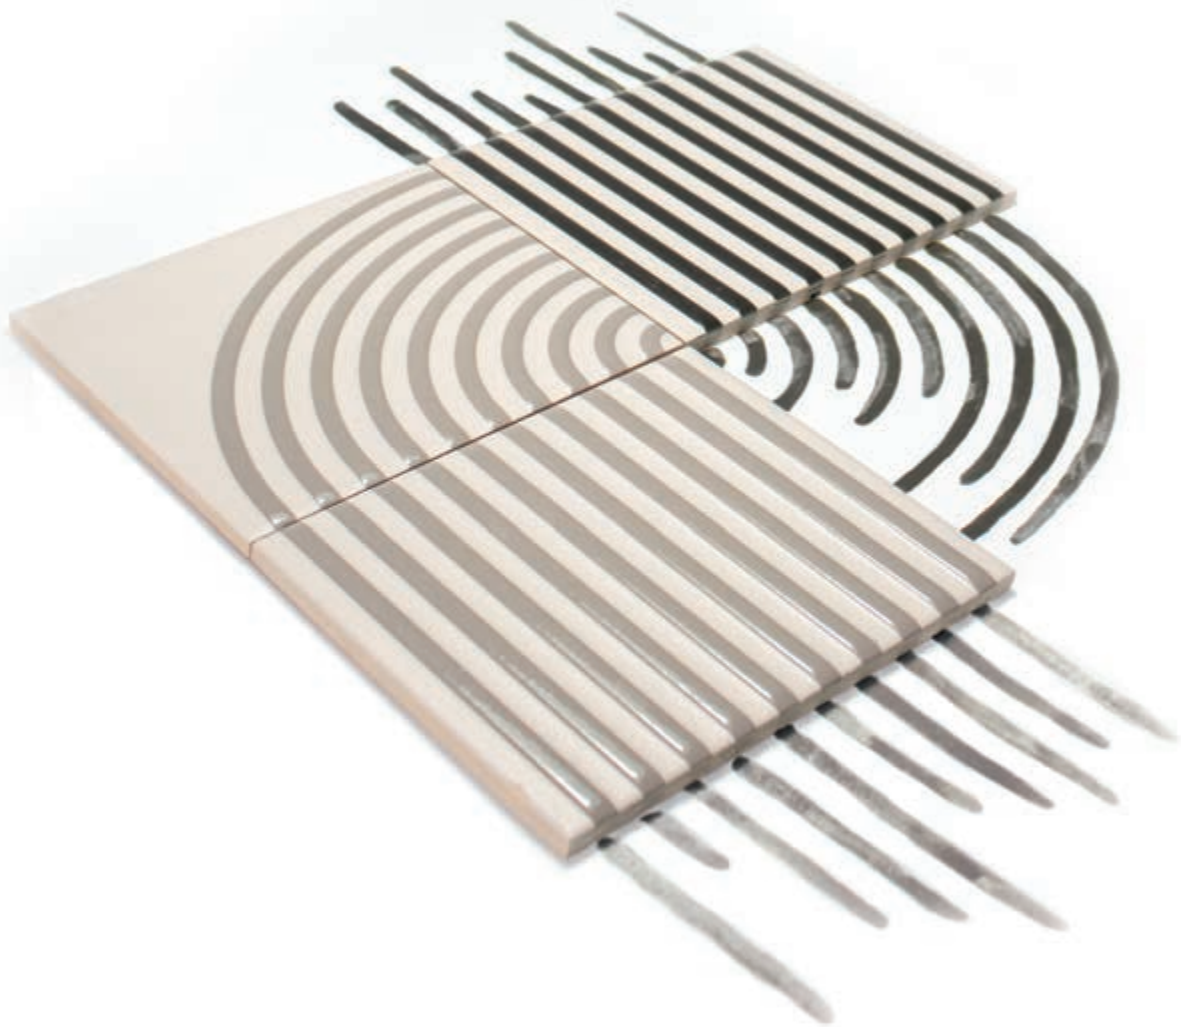


◀ T DST 06
Twist DST 14
Er DST 21



DISTRICT



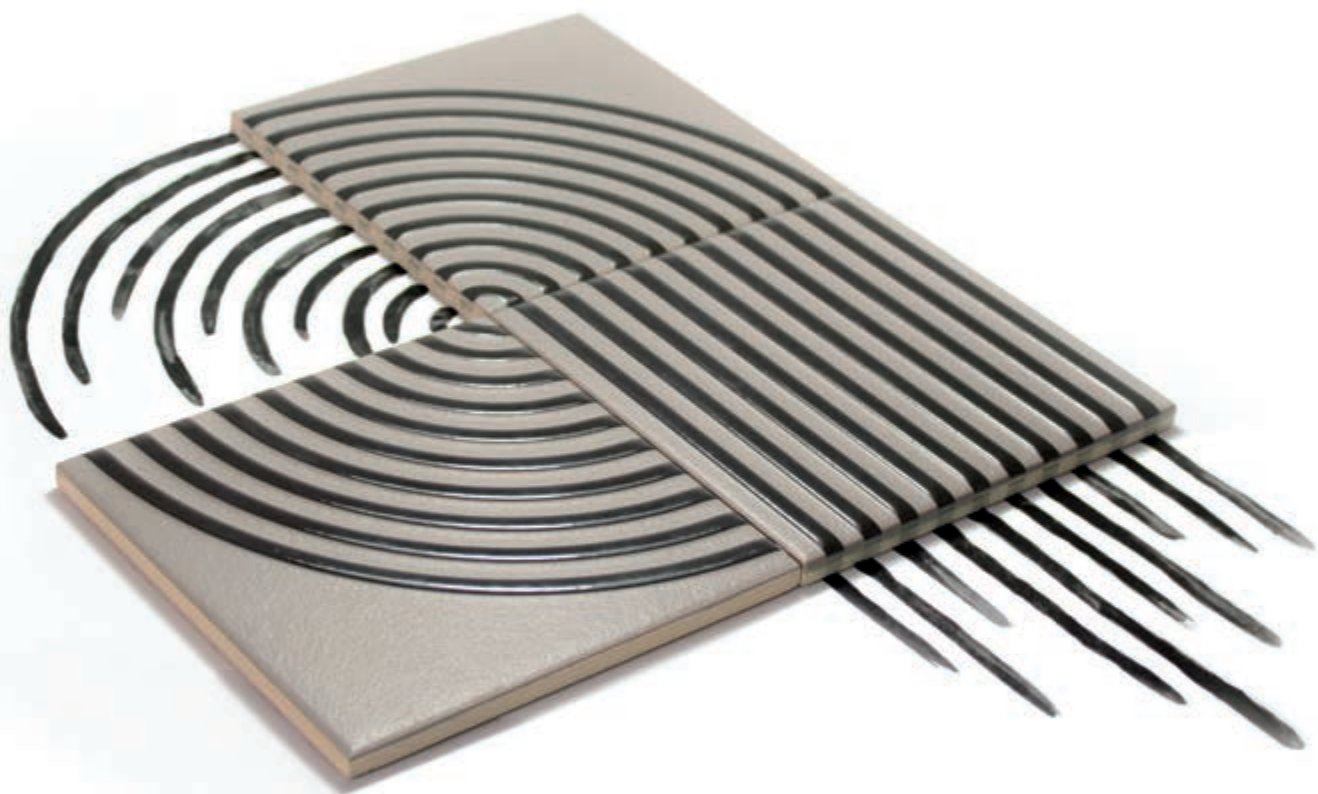


◀ T DST 07
Er DST 22



Technical features for Dry-Pressed ceramic tiles with water absorption BIII (Eb >10%)			
FEATURES		SPECIFICATION /	NORMA
	Dimensional Features	124,3 mm +/- 0,75 mm % x 124,3 mm +/- 0,75 mm	UNE-EN ISO 10545-2:1998
	Water absorption	>10%	UNE-EN ISO 10545-3:1997
	Modulus of rupture and breaking strength	Thickness ≥ 7,5 mm mínimo 12 N/mm² Thickness < 7,5 mm mínimo 15 N/mm²	UNE-EN ISO 10545-4:2012
	Crazing resistance	Pass	UNE-EN ISO 10545-11:1997
	Household products resistance	GA	UNE-EN ISO 10545-13:1998
	Chemical resistance	GHA	UNE-EN ISO 10545-13:1998
	Stain resistance	5	UNE-EN ISO 10545-14:1998
	White Body	-	

			LB 	FT2 		FT2 
Model	Format (in)	Pieces / Box	Lb/ box	sq ft / Box	Boxes / Pallet	sq ft / Pallet
T	5"x5"	39	17.37 lb	6.491 ft²	102	662.082 ft²
TWIST	5"x5"	36	17.64 lb	5.985 ft²	102	610.470 ft²
ER	5"x5"	36	17.53 lb	5.985 ft²	102	610.470 ft²

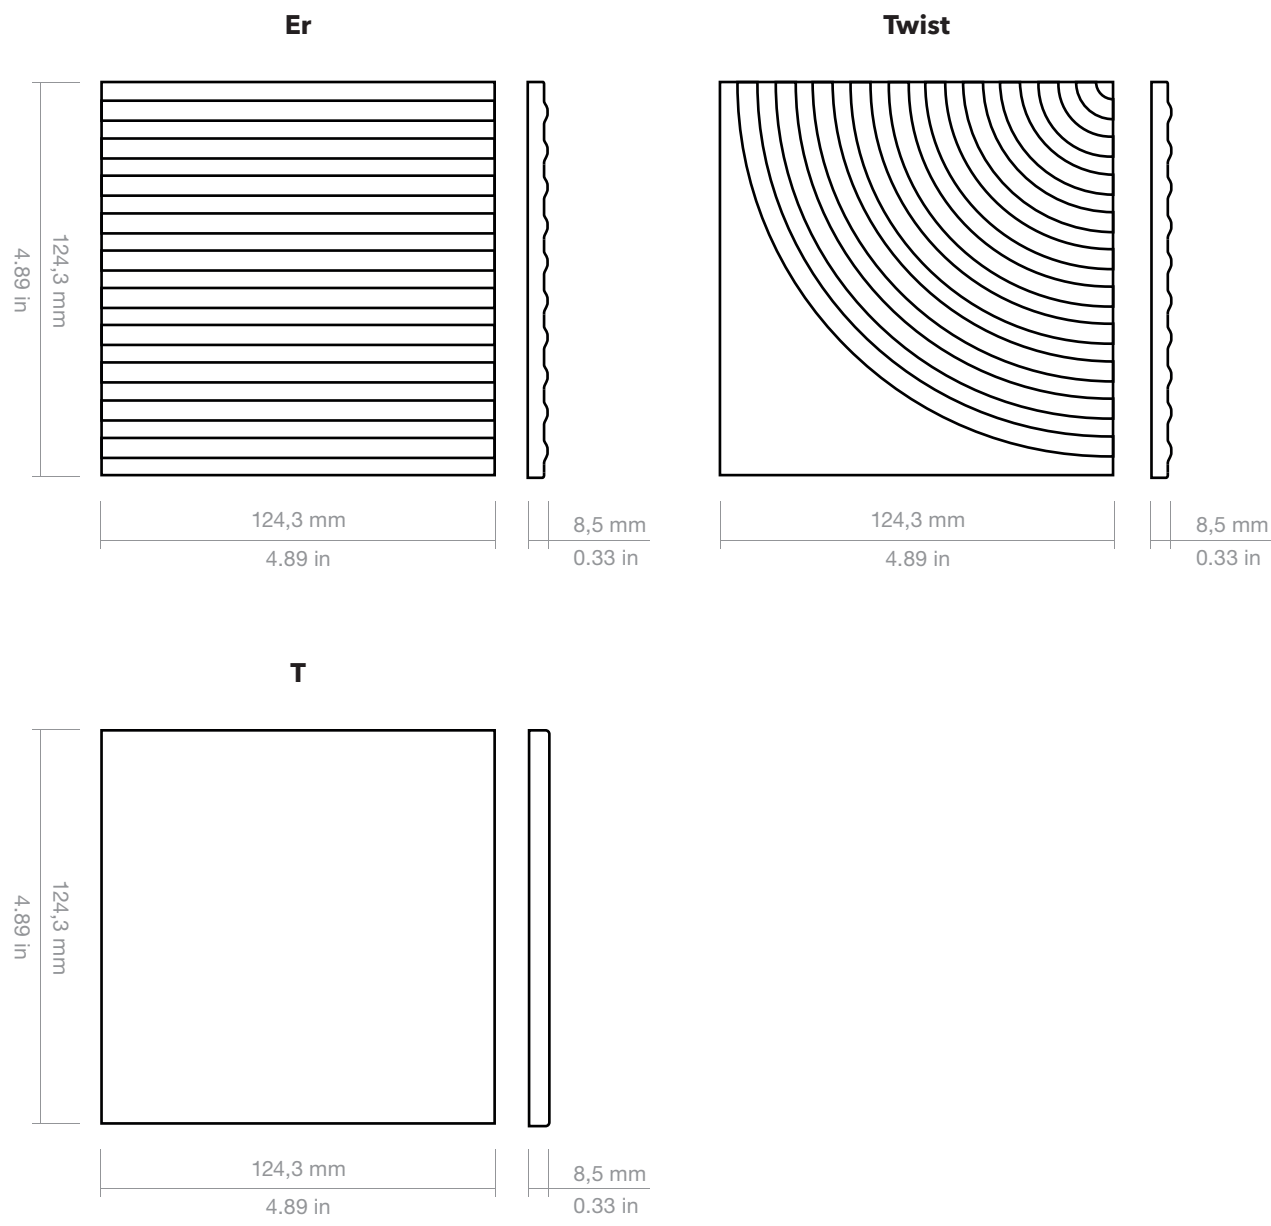

BEFORE INSTALLING THE PRODUCT

The surface where the product is being installed must be clean and level.

It is recommended that the layout of the product is prepared before the final installation.

Make sure you choose an adhesive apt for the area where the product is being installed.

TO ENHANCE YOUR PRODUCT

In order to obtain the maximum effect, use 1,5 mm - 0.059 in spacers between the tiles to maintain an even installation over the whole surface.

The colour of the grout should be as close as possible to the colour of your product.


Once the area has been grouted, and before the grout dries, remove any excess material with a damp sponge.

MAINTENANCE

Maintenance free. Easy and practical to care for, due to the high standard of technical characteristics in each ceramic product.

Avoid abrasive or acidic cleaning products.

It is recommended to clean with clear water.

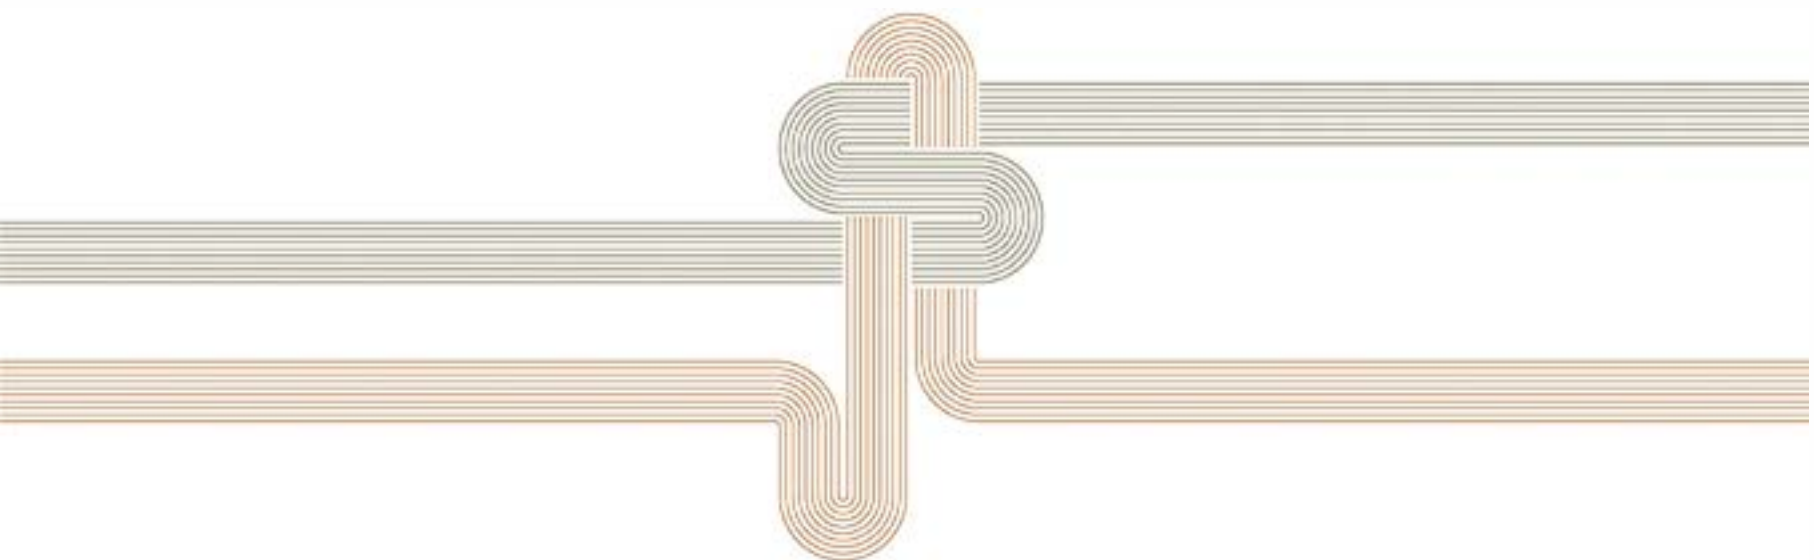

diesse
tile specialists